

NEW

includes Multichoice SatCR user bands



SPACE TELEVISION



16 USER BANDS PER OUTPUT PORT
16 SUBSCRIBER OUTPUT PORTS **9748MC**

16 USER BANDS PER OUTPUT PORT
8 SUBSCRIBER OUTPUT PORTS **9746MC**

16 USER BANDS PER OUTPUT PORT
4 SUBSCRIBER OUTPUT PORTS **9744MC**

 **johansson®**


UNICABLE

SINGLE CABLE DISTRIBUTION TO EACH APARTMENT

HELPLINE 0861 40 41 42 • www.spacetv.co.za

SatCR MULTISWITCHES (REF: 9744MC, 9746MC, 9748MC)

SINGLE CABLE TECHNOLOGY DIGITAL CHANNEL STACKING SWITCHES FOR MULTICHOICE

EACH 974xMC UNIT HAS:

- 4 cascable LNB inputs for a universal Quattro/Quad LNB
- 1 terrestrial trunk
- 4, 8 or 16 SCR/Legacy outputs (9744MC, 9746MC or 9748MC)
- 1 DC input

EACH OUTPUT CAN SUPPORT A WIDE VARIETY OF SATELLITE RECEIVERS:

- In Legacy mode, the 974xMC outputs can be used as a standard multiswitch
- In SCR mode, each 974xMC output supports up to 16UBs with all versions of the single cable technology
- This includes OLT, SCR, CSS, EN50494, EN50607, and newer versions

AS ALL OUTPUTS ARE INDEPENDENT, THE INSTALLATION CAN BE A MIX OF LEGACY AND SCR CONNECTIONS

THE OUTPUTS WILL AUTOMATICALLY DETECT THE APPROPRIATE MODE (SCR OR LEGACY)

The terrestrial path allows support of any service operating below 1 GHz, including terrestrial cable and DOCSIS reception

- The terrestrial path can be amplified or bypass
- via user selected switch
- LTE 4G ready - built in filtering

MULTIPLE WAYS TO POWER THE PRODUCT

- Powered from the DC Input: use ref. 2460(UK)
- Power from Trunk : this is if another 974xMC is
- powering the system
 - Each product has a power-up diagnostic mode with a LED to indicate if power is adequate for the system
- Power from the STB or MC power inserter
- Special low power Legacy mode <2W


DSCR MULTISWITCHES

- 4 cascadeable LNB inputs from universal Quattro LNB: VL-HL-VH-HH
- 1 terrestrial trunk (active or passive)
- 4/8/16 SCR/Legacy outputs
- 16 User Bands per output
- 1 DC input.




9748MC

- 4 satellite + 1 Terrestrial inputs
- 16 outputs with 16 User Band per output
 - Up to 16 UBs per SCR Output
 - Auto Detection for SCR and Legacy Mode
 - Support all SCR standards
 - Compatible with all Legacy STBs
 - Amplified / Bypass terrestrial diplexer
 - Soft power-up mode for Legacy
 - Power diagnostics for trunk power

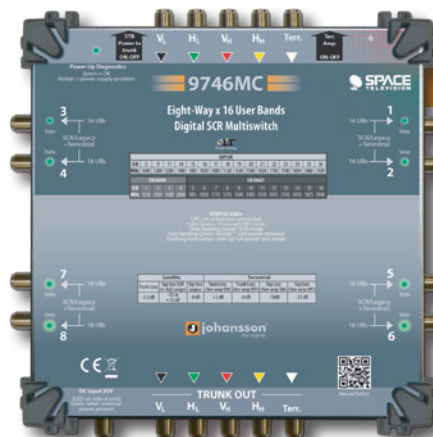

9746MC

- 4 satellite + 1 Terrestrial inputs
- 8 outputs with 16 User Band per output
 - Up to 8 UBs per SCR Output
 - Auto Detection for SCR and Legacy Mode
 - Support all SCR standards
 - Compatible with all Legacy STBs
 - Amplified / Bypass terrestrial diplexer
 - Soft power-up mode for Legacy
 - Power diagnostics for trunk power

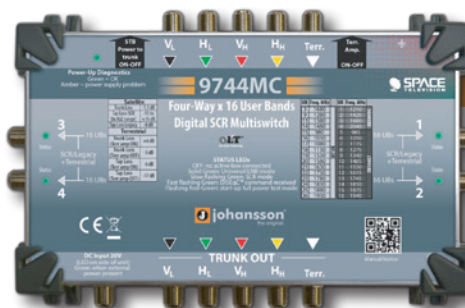

9744MC

- 4 satellite + 1 Terrestrial inputs
- 4 outputs with 16 User Band per output
 - Up to 4 UBs per SCR Output
 - Auto Detection for SCR and Legacy Mode
 - Support all SCR standards
 - Compatible with all Legacy STBs
 - Amplified / Bypass terrestrial diplexer
 - Soft power-up mode for Legacy
 - Power diagnostics for trunk power