


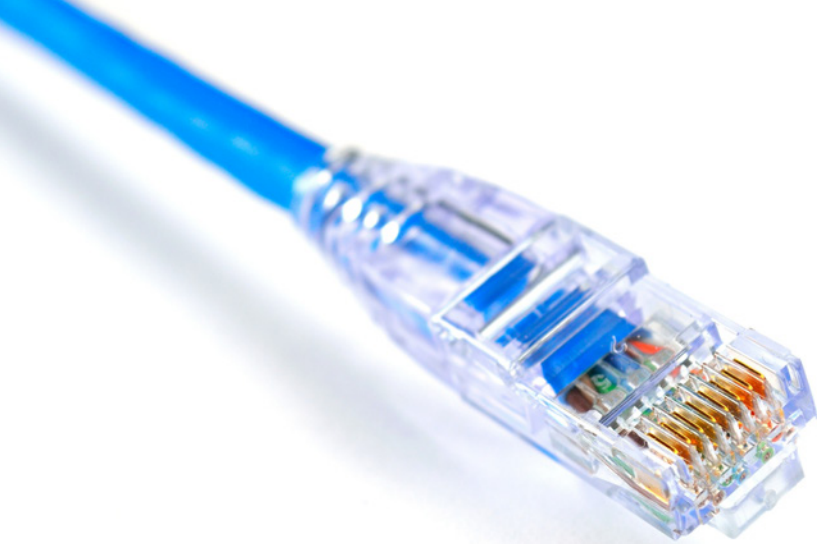

SNS-24P

24 PORT 10/100/1000M ETHERNET SWITCH

The Ethernet Switch provides 24 10/100/1000Mbps Auto-Negotiation RJ45 ports. All ports support Auto MDI/MDIX function, eliminating the need for crossover cables or Uplink ports. The Switch is Plug-and-Play and each port can be used as general ports or Uplink ports and can be simply plugged into a server, a hub or a switch, using straight cable or crossover cable.

TECHNICAL SPECIFICATIONS: SNS-24P

Interface	24 10/100/1000/Mbps RJ45 Ports AUTO Negotiation/AUTO MDI/MDIX
Power	Input: 100~240VAC 50/60HZ
Transfer Method	Store and Forward
Advanced Functions	Green Technology, saving power up to 70% 802.3X Flow Control, Back Pressure Auto-Uplink Every Port
Package Contents	24-Port 10/100/1000Mbps Desktop Switch Power supply Cable
Environment	Operating Temperature: 0°~40°C Storage Temperature: -40°~70°C Operating Humidity: 10%~90% non-condensing; Storage Humidity: 5%~90% non-condensing

FEATURES:

- Complies with IEEE802.3, IEEE802.3u standards.
- 24 10/100/1000Mbps Auto-Negotiation RJ45 ports supporting Auto-MDI/MDIX.
- Supports IEEE802.3x flow control for Full Duplex mode and backpressure for half-duplex mode.
- Supports MAC address auto-learning and auto-aging.
- LED indicators for monitoring power, link, activity.
- 19" rack-mount mode Metal case Internal power supply 100~240VAC 50/60HZ
- Dimensions 440x180x44mm