

3-WAY SMART SPLITTER

3-way dSCR smart splitter
with heartbeat pass-through



Easily share your dSCR/dCSS signals to multiple STBs


The **Johansson 4606** 3-Way Smart Splitter is designed to facilitate the sharing of a single dSCR/dCSS multiswitch or GTU output between multiple set-top boxes, making it ideal for home entertainment systems with several decoders. The intelligent circuitry in the 3-Way dSCR Smart Splitter passes the heartbeat across all 3 outputs and prevents DiSEqC signal collisions when more than one decoder is connected to a single output.

JOHANSSON 4606 - MAIN FEATURES:

- Heartbeat passes through all 3 outputs, ideal for Xtraview installations
- No DiseqC dSCR/dCSS signals collision
- Compatible with any DC level dSCR/dCSS Set-Top-Box
- Built-in dSCR/dCSS Power Inserter
- Supports the EN50494 standard
- Schottky diodes for low voltage drop off

JOHANSSON 4606 - SPECIFICATIONS

Outputs	3
Frequency range	5-2150 Mhz
Insertion loss	9 dB
Return loss in / out	>10 dB
DC power pass	50 mA (max.)
Input Voltage	12 min. / 20 max. VDC
DiSEqC	DiSEqC compliant
SCR Standard	EN50494
Dimensions (W x H x D)	114 x 56 x 35 (mm)

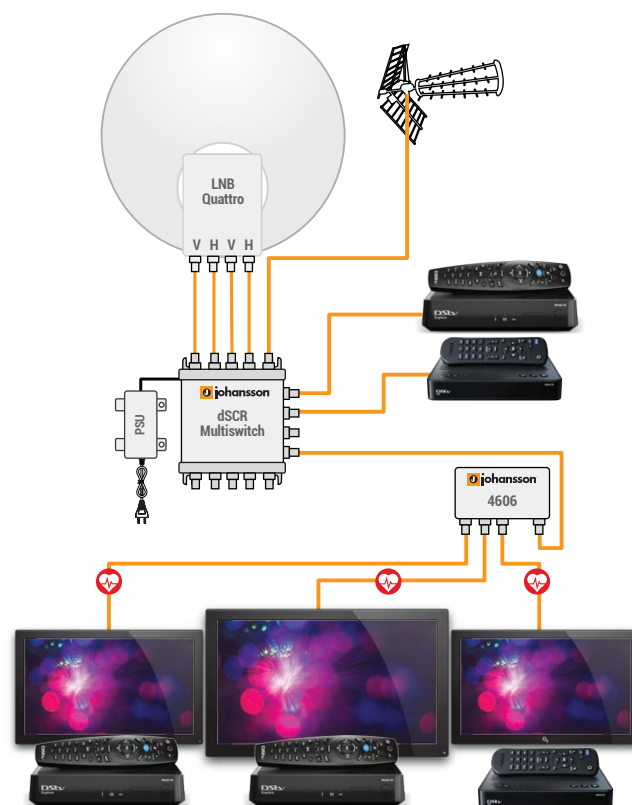

Heartbeat passes through all 3 outputs making it ideal for Xtraview installations.